


TILE STOP S

PRETHODNO OBLIKOVANE KUKE U OBLIKU SLOVA S ZA GLATKE CRJEPOVE

- Izbjegava se klizanje pokrova
- Polazu se na suho
- Brzo i sigurno spajanje
- Izbjegava se polaganje s pjenom ili mortom prema normi UNI 9460
- Dostupan je širok asortiman materijala i dimenzija

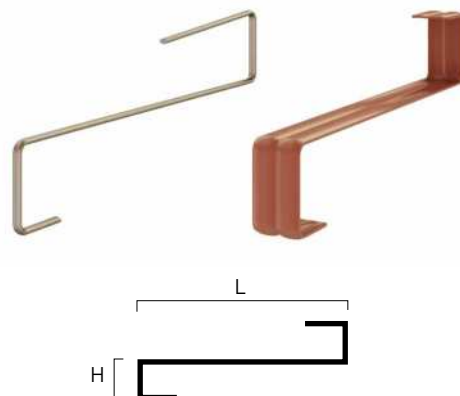

KODOVI I DIMENZIJE

KOD	L [mm]	H [mm]	L [in]	H [in]	materijal	boja	RAL	
TSSI9016 ⁽¹⁾	90	16	3.5	0.6	čelik AISI 204	čelik	–	100
TSSI9020 ⁽¹⁾	90	20	3.5	0.8	čelik AISI 204	čelik	–	100
TSSI12016 ⁽¹⁾	120	16	4.7	0.6	čelik AISI 204	čelik	–	50
TSSI12020 ⁽¹⁾	120	20	4.7	0.8	čelik AISI 204	čelik	–	50
TSSRED9016 ⁽¹⁾	90	16	3.5	0.6	prethodno lakirani lim	crvena boja pigmenta sijena	3009	50
TSSRED9020 ⁽¹⁾	90	20	3.5	0.8	prethodno lakirani lim	crvena boja pigmenta sijena	3009	50
TSSRED12016 ⁽¹⁾	120	16	4.7	0.6	prethodno lakirani lim	crvena boja pigmenta sijena	3009	50
TSSRED12020 ⁽¹⁾	120	20	4.7	0.8	prethodno lakirani lim	crvena boja pigmenta sijena	3009	50
TSSBRO9016 ⁽¹⁾	90	16	3.5	0.6	prethodno lakirani lim	smeđa	8019	100
TSSBRO9020 ⁽¹⁾	90	20	3.5	0.8	prethodno lakirani lim	smeđa	8019	100
TSSCOP9016 ⁽¹⁾	90	16	3.5	0.6	traka od nehrđajućeg čelika	bakar	–	50
TSSCOP9020 ⁽¹⁾	90	20	3.5	0.8	traka od nehrđajućeg čelika	bakar	–	50

⁽¹⁾ Proizvod je dostupan samo na narudžbu.

 Razvrstavanje otpada (2014/955/EU): 17 04 05.

SAVJETI ZA POLAGANJE

