

PATROL + WAVE

LIFELINE ON SUPPORT FOR CORRUGATED SHEET METAL ROOFS

SIMPLE

Simple and quick installation, thanks to the shape obtained with a single plate.

COMPLETE

The package includes fasteners and cellular rubber gaskets, to ensure waterproofing.

FUNCTIONAL

WAVE can be used as either an end, intermediate or angular support for lifeline systems.

EN
795:2012
C

CEN/TS
18418:2013

UNI
11578:2015
C





MAXIMUM NUMBER
OF USERS




LOAD DIRECTION




TYPES OF
APPLICATION





PATROL LIFELINE COMPONENTS

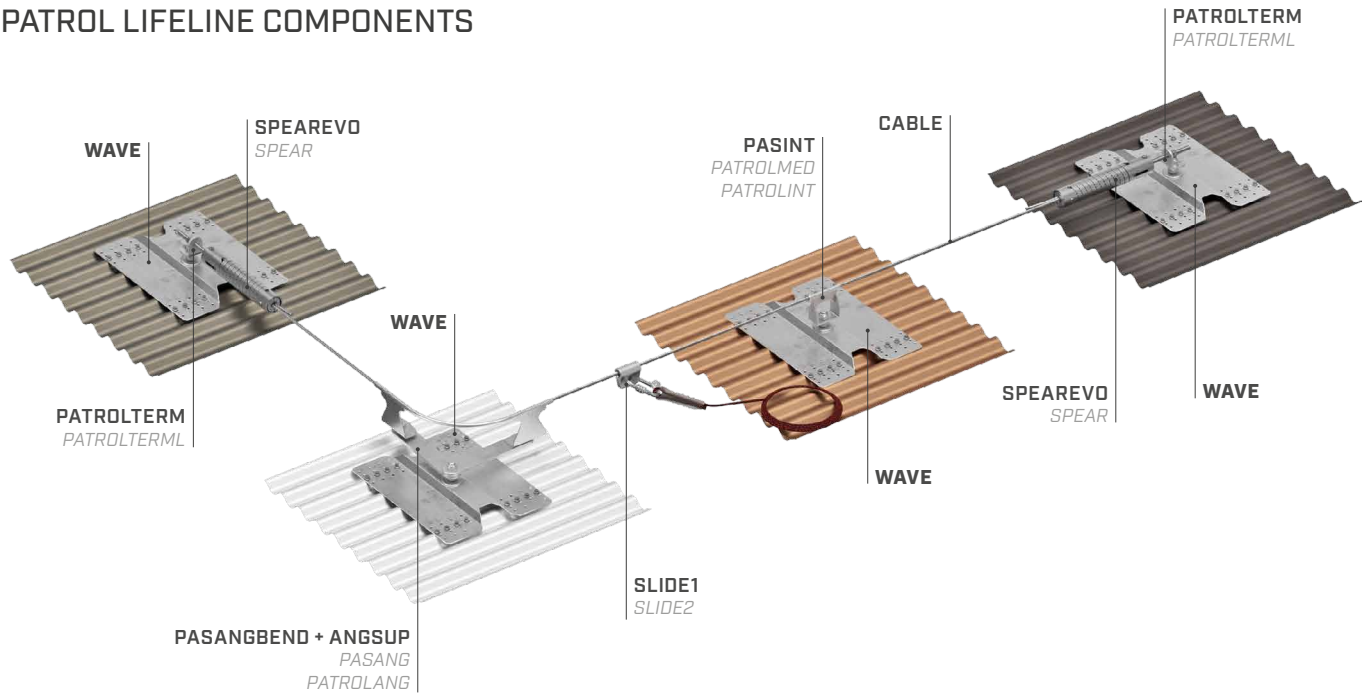

TECHNICAL DATA*


substructure	minimum thickness	fastening systems included
 Fe	0,63 mm	self-drilling screws 5,5 x 25 mm A2 with EPDM washer (x16) 4 EPDM gaskets

Wave pitch: 76 mm.

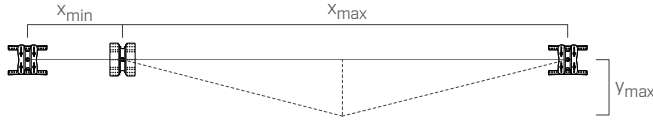			SPEAREVO	
			<div> <div>EN 795:2012 C</div> <div>CEN/TS 16415:2013</div> <div>UNI 11578:2015 C</div> </div>	
users		no.		
minimum span	x_{min}	[m]	2	
maximum span	x_{max}	[m]	15	
maximum deflection	y_{max}	[m]	3,40	

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

WAVE | CODES AND DIMENSIONS

CODE	description	material		B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
WAVE	support for corrugated sheet metal	AISI 304 stainless steel grade 1.4301		420 16 9/16	65 2 9/16	322 12 11/16	1	