

I ALL WALK

WALKWAYS AND OVERPASS

MODULAR

Standard modules to create safe and effective walkways and overpass systems, with or without railings.

ADAPTABLE


Specific supports for the most common types of roofs and substructures allow the product to be adapted to various needs.

LIGHT

The system, made of aluminium alloy, is lightweight and easy both to transport and install.

EN
14122-3

EN
14122-2

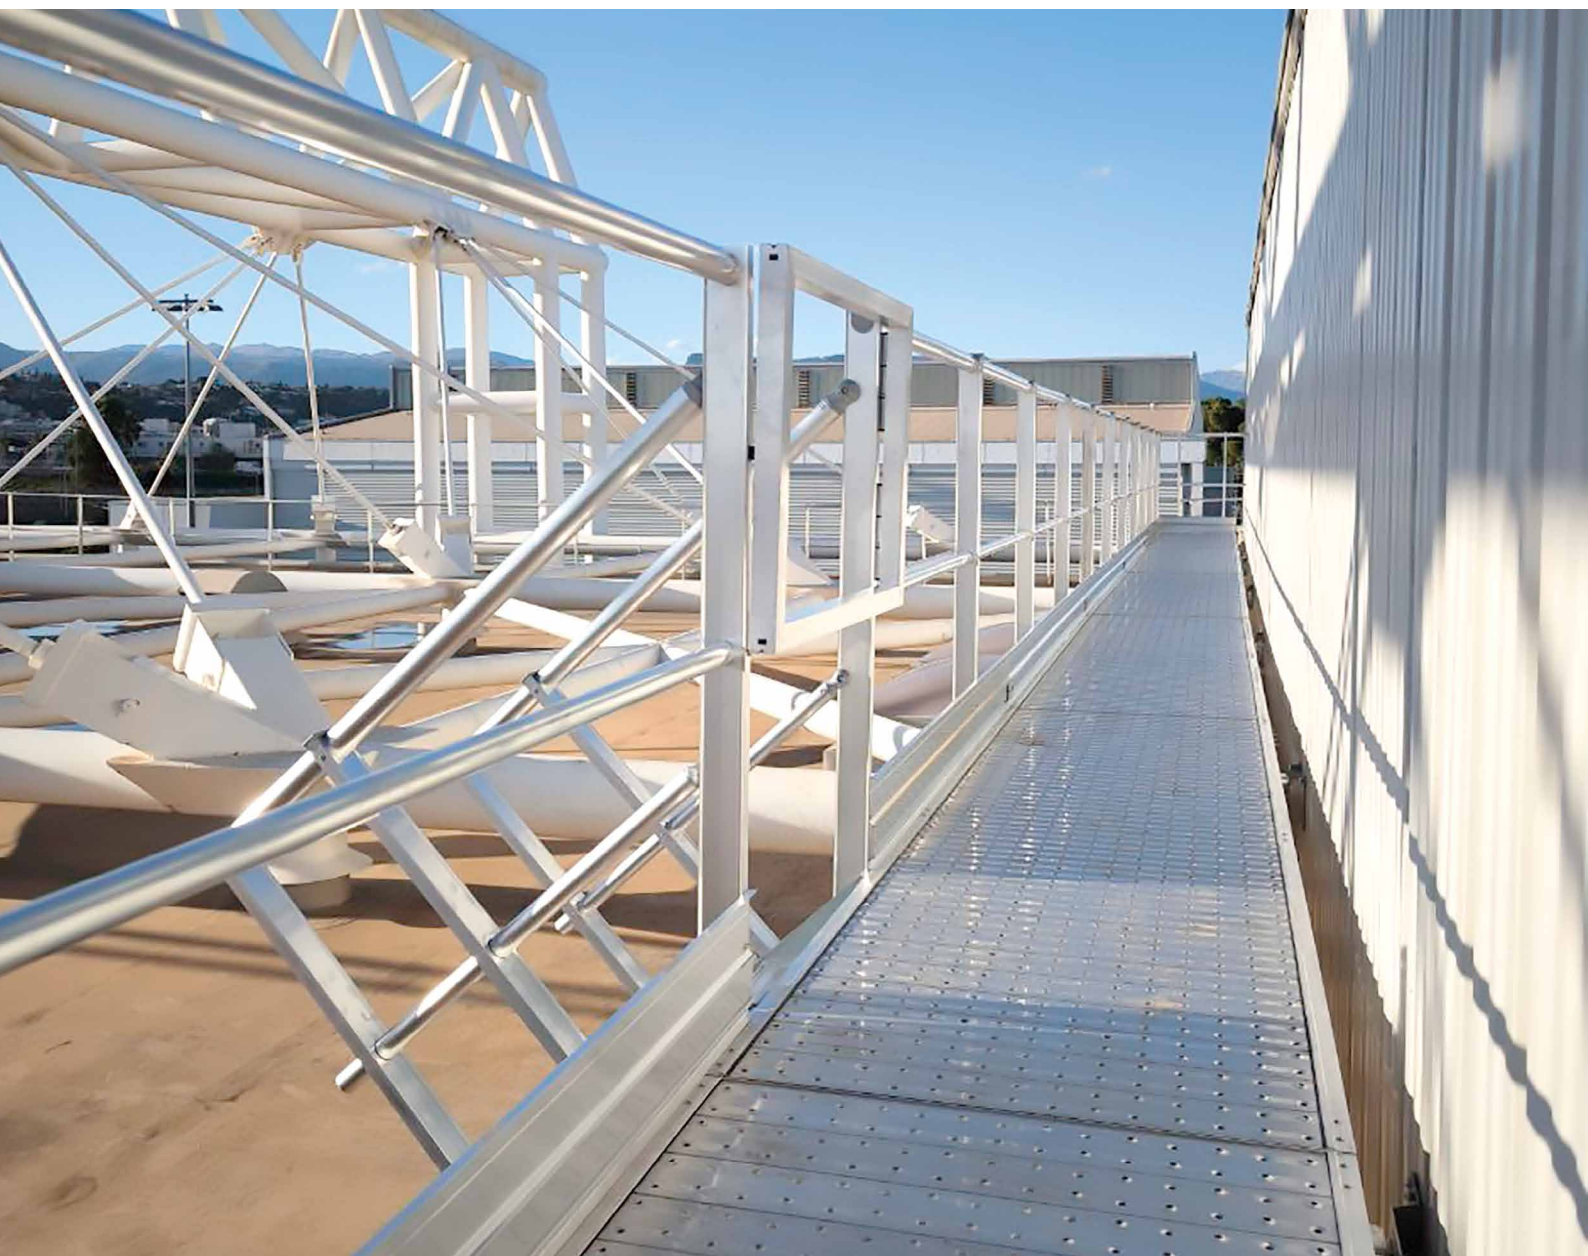

TYPE OF SYSTEMS


WALKWAYS WITH HORIZONTAL AND INCLINED FASTENING



WALKWAYS WITH FASTENING ON TRAPEZOIDAL METAL




WALKWAYS WITH SIDE FASTENING

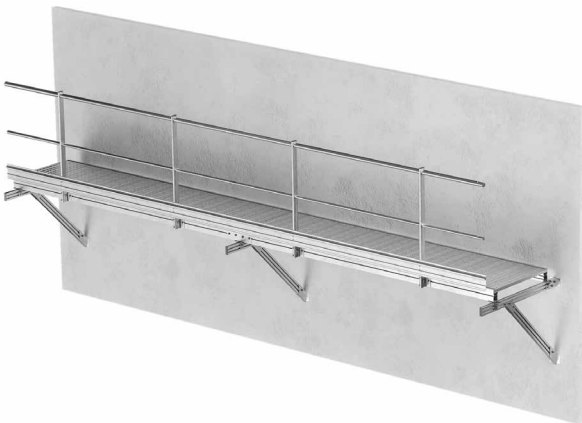

WALKWAYS



INCLINED LADDER

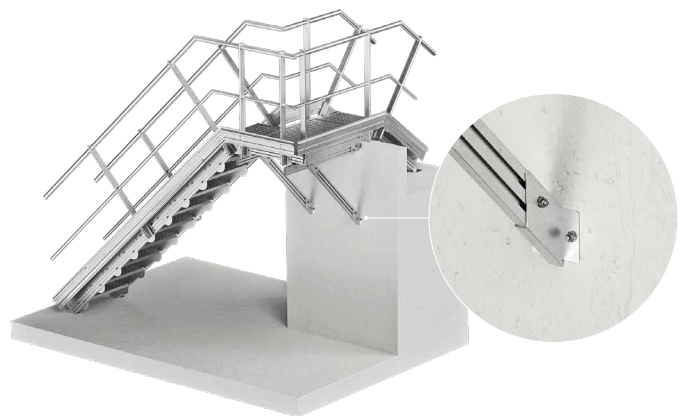

GUIDELINES FOR COMPOSITION OF WALKWAYS AND OVERPASSES

- Tailor-made solutions to meet every design requirement.
- Fastening systems and types are interchangeable.
- Applicable standards (EN 14122-3, EN 14122-2, local regulations) must be determined by the project engineer.
- All systems are compatible with the BORDER railing.
- Standard available widths for walkways and overpasses: 600, 800, 1000 and 1200 mm.
- Standard available widths for inclined ladders: 600 and 800 mm.
- Other systems and solutions are available on request.