

SCREW ANCHOR FOR CONCRETE CE1

SEISMIC PERFORMANCE


Certified for applications on cracked and non-cracked concrete and in performance class for seismic actions C1 (M10-M16) [d_1 0.40-0.63 inch] and C2 (M12-M16) [d_1 0.48-0.63 inch].

IMMEDIATE STRENGTH

Its operating principle allows the load to be applied after zero waiting times.

OPERATION BY SHAPE

The stresses acting on the anchor are transmitted to the substrate predominantly through the interaction of the geometric conformation of the anchor, in particular, diameter and thread; allowing it to lock into the substrate and guaranteeing the seal.

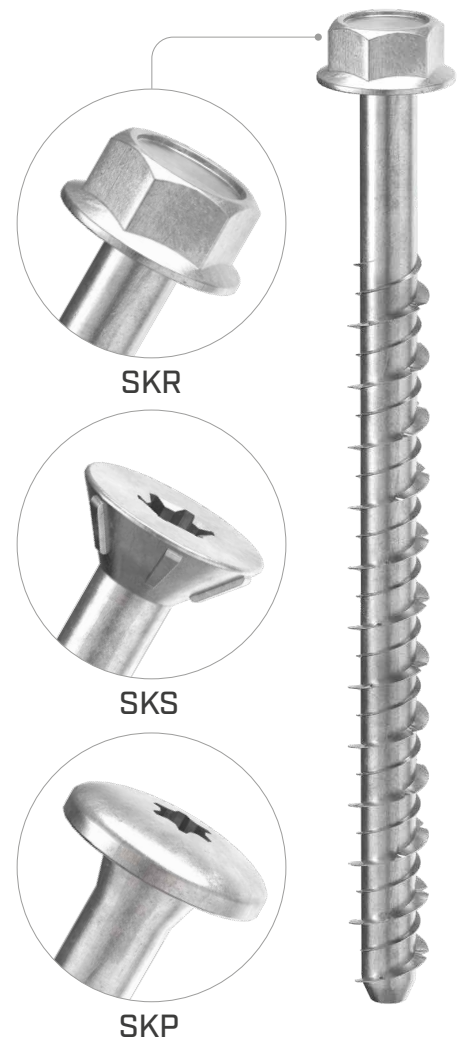

| | |
|-------------------------|---|
| DIAMETER [in] | 0.24 0.24 0.63 0.63 |
| LENGTH [in] | 2 1/16 (2 3/8 11 7/16) 15 3/4 |
| EXPOSURE CONDITION | EC1 DRY |
| ATMOSPHERIC CORROSIVITY | C1 C2 |
| WOOD CORROSIVITY | T1 T2 |
| MATERIAL | Zn ELECTRO PLATED electrogalvanized carbon steel |

CODES AND DIMENSIONS

SKR - hexagonal washer head

| d ₁ [mm] [in] | CODE | L | | t _{fix} [in] | h _{1,min} [in] | h _{nom} [in] | h _{ef} [in] | d ₀ [in] | d _F [in] | T _{inst} [ft-lbs] | N _{p,uncr} ^(*) [lbs] | pcs |
|--------------------------------|----------|-----|---------|--------------------------|----------------------------|--------------------------|-------------------------|------------------------|------------------------|-------------------------------|---|-----|
| 8 0.32 SW 10 | SKR8100 | 100 | 4 | 1 9/16 | 2 15/16 | 2 3/8 | 1 7/8 | 7/32 | 3/8 | 154 | 3979 | 50 |
| 10 0.40 SW 13 | SKR1080 | 80 | 3 1/8 | 3/8 | 3 3/8 | 2 3/4 | 2 3/16 | 5/16 | 1/2 | 154 | 5305 | 50 |
| | SKR10100 | 100 | 4 | 1 3/16 | 3 3/8 | 2 3/4 | 2 3/16 | 5/16 | 1/2 | 154 | 5305 | 25 |
| | SKR10120 | 120 | 4 3/4 | 1 15/16 | 3 3/8 | 2 3/4 | 2 3/16 | 5/16 | 1/2 | 154 | 5305 | 25 |
| | SKR1290 | 90 | 3 1/2 | 3/8 | 4 | 3 1/8 | 2 1/2 | 3/8 | 9/16 | 243 | 6789 | 25 |
| | SKR12110 | 110 | 4 3/8 | 1 3/16 | 4 | 3 1/8 | 2 1/2 | 3/8 | 9/16 | 243 | 6789 | 25 |
| 12 0.48 SW 15 | SKR12150 | 150 | 6 | 2 3/4 | 4 | 3 1/8 | 2 1/2 | 3/8 | 9/16 | 243 | 6789 | 25 |
| | SKR12210 | 210 | 8 1/4 | 5 1/8 | 4 | 3 1/8 | 2 1/2 | 3/8 | 9/16 | 243 | 6789 | 20 |
| | SKR12250 | 250 | 10 | 6 3/4 | 4 | 3 1/8 | 2 1/2 | 3/8 | 9/16 | 243 | 6789 | 15 |
| | SKR12290 | 290 | 11 7/16 | 8 1/4 | 4 | 3 1/8 | 2 1/2 | 3/8 | 9/16 | 243 | 6789 | 15 |
| 16 0.63 SW 21 | SKR16130 | 130 | 5 1/8 | 1 3/16 | 5 1/2 | 4 3/8 | 3 3/8 | 9/16 | 11/16 | 243 | 8880 | 10 |

(*) $N_{p,uncr}$ = pull-out resistance in uncracked concrete (mean test value). Values obtained from pull-out tests. For ASD values the designer shall refer to the relevant standard.

SKS - countersunk head

| d_1 [mm] [in] | CODE | L [mm] [in] | | t_{fix} [in] | $h_{1,min}$ [in] | h_{nom} [in] | h_{ef} [in] | d_0 [in] | d_F [in] | d_K [in] | $N_{p,uncr}^{(*)}$ [lbs] | pcs |
|-----------------------|----------|-------------------|-------|-------------------|---------------------|-------------------|------------------|---------------|---------------|---------------|-----------------------------|-----|
| 6 0.24 TX 30 | SKS660 | 60 | 2 3/8 | 3/8 | 2 3/16 | 1 15/16 | 1 1/2 | 3/16 | 1/4 | 0.433 | 2945 | 100 |
| 7,5 0.29 TX 30 | SKS880 | 80 | 3 1/8 | 13/16 | 2 15/16 | 2 3/8 | 1 7/8 | 7/32 | 3/8 | 0.551 | 3979 | 50 |
| 10 0.29 TX 30 | SKS8100 | 100 | 4 | 1 9/16 | 2 15/16 | 2 3/8 | 1 7/8 | 7/32 | 3/8 | 0.551 | 3979 | 50 |
| 10 0.40 TX 40 | SKS10100 | 100 | 4 | 1 3/16 | 3 3/8 | 2 3/4 | 2 3/16 | 5/16 | 1/2 | 0.787 | 5305 | 50 |

(*) $N_{p,uncr}$ = pull-out resistance in uncracked concrete (mean test value). Values obtained from pull-out tests. For ASD values the designer shall refer to the relevant standard.

SKP - pan head


| d_1 [mm] [in] | CODE | L [mm] [in] | | t_{fix} [in] | $h_{1,min}$ [in] | h_{nom} [in] | h_{ef} [in] | d_0 [in] | d_F [in] | d_K [in] | $N_{p,uncr}^{(*)}$ [lbs] | pcs |
|-----------------------|---------|-------------------|-------|-------------------|---------------------|-------------------|------------------|---------------|---------------|---------------|-----------------------------|-----|
| 6 0.24 TX 30 | SKP680 | 80 | 3 1/8 | 1 3/16 | 2 3/16 | 1 15/16 | 1 1/2 | 3/16 | 1/4 | 0.472 | 2945 | 50 |
| | SKP6100 | 100 | 4 | 1 15/16 | 2 3/16 | 1 15/16 | 1 1/2 | 3/16 | 1/4 | 0.472 | 2945 | 50 |

(*) $N_{p,uncr}$ = pull-out resistance in uncracked concrete (mean test value). Values obtained from pull-out tests. For ASD values the designer shall refer to the relevant standard.

ADDITIONAL PRODUCTS - ACCESSORIES

| CODE | description | pcs |
|----------|-------------------------------|-----|
| SOCKET10 | SW 10 bushing 1/2" connection | 1 |
| SOCKET13 | SW 13 bushing 1/2" connection | 1 |
| SOCKET15 | SW 15 bushing 1/2" connection | 1 |
| SOCKET21 | SW 21 bushing 1/2" connection | 1 |

GEOMETRY

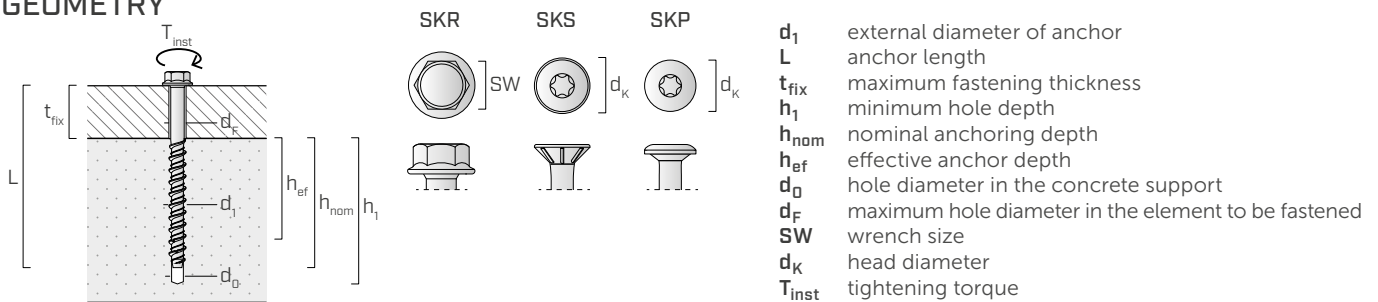

ASSEMBLY

