

KUTNIK ZA LOG HOUSE

UČINKOVITO

Zahvaljujući posebnoj geometriji podupiru se higrometrijske deformacije drva.

PROFILI

Idealne verzije za pričvršćivanje drvenih profila na vodoravne drvene blokove (LOG210).

GREDE


Idealne verzije za pričvršćivanje drvenih gredica na vodoravne drvene blokove (LOG250).



DEBLJINA [mm]

2,0 mm

GEOMETRIJA

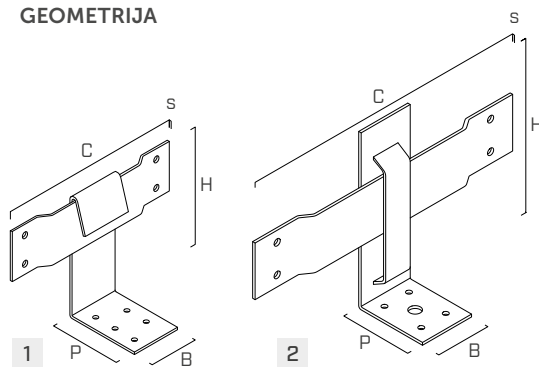


MATERIJAL



ugljični čelik DX51D + Z275

UPORABNA KLASA

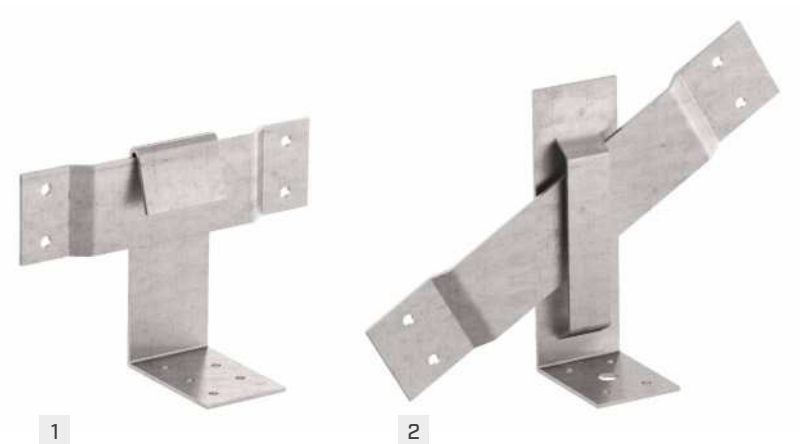

KODOVI I DIMENZIJE

KOD	B	P	H	C	s	n Ø5	n Ø8,5	kom.
	[mm]	[mm]	[mm]	[mm]	[mm]	[kom.]	[kom.]	
1 LOG210	40	65	78	210	2	9	-	25
2 LOG250	40	52	125	250	2	8	1	25



PODRUČJA PRIMJENE

Posebna ploča za spojeve za koje treba veća sloboda pomicanja.

Primjena:

- masivno i lamelirano drvo
- LVL
- drugi materijali na bazi drva