


TOPLATE 2.0

COUNTERPLATE FOR TOWER/TOWER XL

- Counterplate for TOWER/TOWER XL




CODES AND DIMENSIONS

CODE	material	B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs
TOPLATE2	S235JR zinc plated steel	350 13 3/4	8 5/16	350 13 3/4	1

COMPLEMENTARY PRODUCTS

no.	CODE	description	Ø [mm]
4	MGS	threaded rod	12
4	KOS	hexagonal head bolt	

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

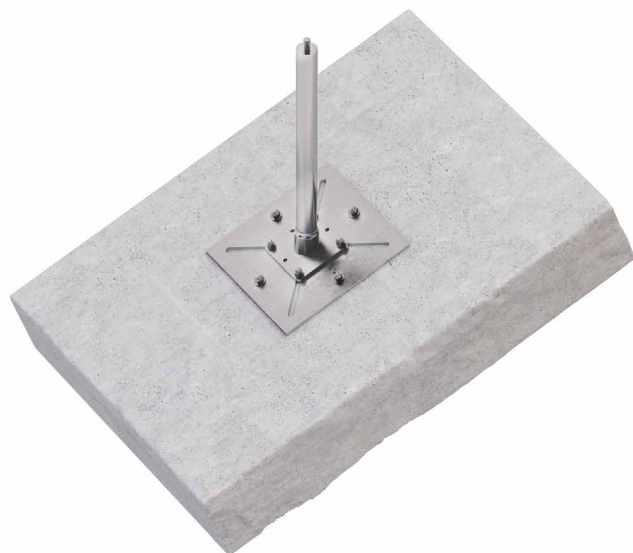

TRAPO

SUPPORT FOR TOWER XL ON TRAPEZOIDAL STEEL DECK ROOFS

- It can be assembled on trapezoidal steel decks min. thickness 0.75 mm with or without insulation layer (included fastening screws)



CODES AND DIMENSIONS

CODE	material	range [mm] [in]	pcs
TRAPO	S235JR zinc plated steel	520 - 660 20 1/2 - 26	1

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

