



DRYWALL SCREW

OPTIMISED GEOMETRY

Bugle head and phosphate-coated steel; ideal for fastening drywall panels.

SHORT PITCH THREAD

Fully short-pitch threaded screw, ideal for fastening on sheet metal supports.

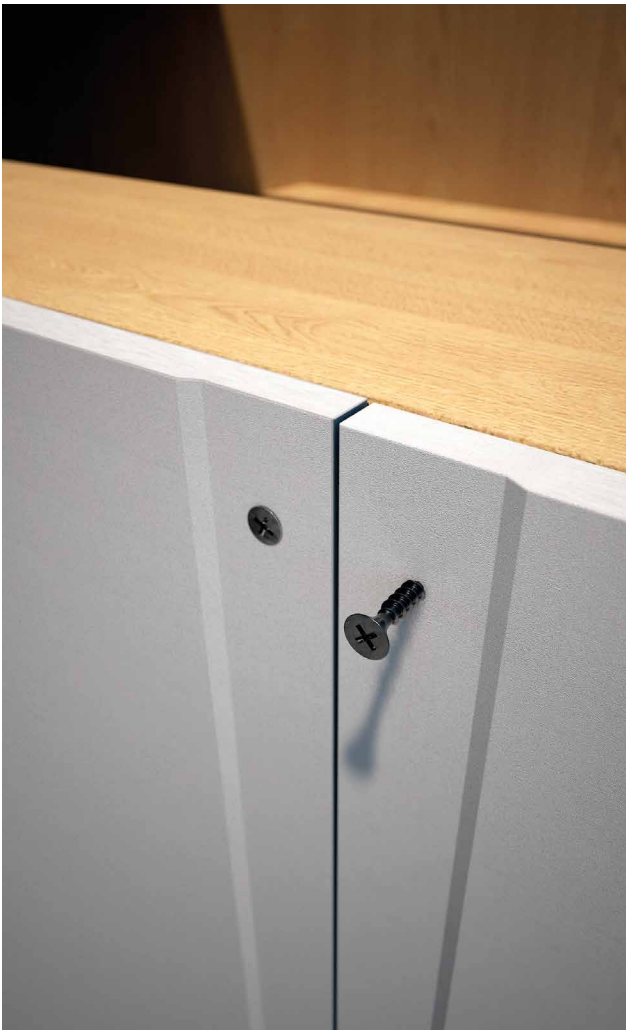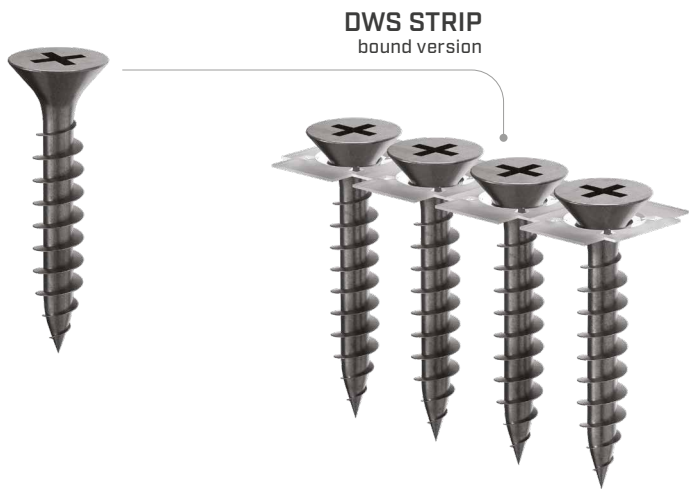

CODES AND DIMENSIONS

DWS - bulk screws


d ₁ [mm] [in]	CODE	L		description	pcs
		[mm]	[in]		
3,5 0.14 #6 PH 2	FE20001	25	1		1000
	FE20005	35	1 3/8	Sheet Metal	1000
	FE20010	45	1 3/4	Substructure	500
	FE20015	55	2 3/16		500
4,2 0.17 #8 PH 2	FE20020	65	2 9/16	Sheet Metal Substructure	200

DWS STRIP - bound screws

d ₁ [mm] [in]	CODE	L		description	pcs
		[mm]	[in]		
3,9 0.15 #7 PH 2	HH10600401	30	1 3/16	timber substructure	10000
	HH10600402	35	1 3/8		10000
	HH10600403	45	1 3/4		10000
3,9 0.15 #7 PH 2	HH10600404	30	1 3/16	Sheet Metal Substructure	10000
	HH10600405	35	1 3/8		10000
	HH10600406	45	1 3/4		10000
3,9 0.15 #7 PH 2	HH10600407	30	1 3/16	Drywall	1000
	HH10600408	35	1 3/8		1000

Compatible with nailgun HH3371

GEOMETRY



DIAMETER [in]
0.14 0.17 0.48

LENGTH [in]
1 2 9/16 8

EXPOSURE CONDITION



ATMOSPHERIC CORROSIVITY



WOOD CORROSIVITY



MATERIAL

