

BUTYL BAND

DOUBLE-SIDED UNIVERSAL BUTYL TAPE



STRONG

The polyester grid guarantees consistence and high resistance.

HERMETIC

Appropriate for watertight seals for timber-to-timber and/or timber-to-concrete joints.

TECHNICAL DATA

Properties	standard	value	USC units
Initial Tack +23/+5 °C	ASTM D 2979	9/14 N	2.0/3.1 lbf
Tensile strength MD/CD	EN 12311-1	115/140 N/50 mm	13.13/16 lbf/in
Elongation MD/CD	EN 12311-1	15/15%	-
Adhesion strength on steel at 180°	ASTM D 1000	31 N/10 mm	17.7 lbf/in
Reaction to fire	EN 13501-1	class E	-
Resistance to temperature	-	-40/+130 °C	-40/+266 °F
Application temperature ⁽¹⁾	-	+0/+45 °C	+32/+113 °F
Storage temperature ⁽²⁾	-	+0/+50 °C	+32/+122 °F
French VOC classification	ISO 16000	A+	-
VOC emissions	EN 16516	very low	-
Solvents	-	no	-
Exposure to weather	-	2 weeks	-


⁽¹⁾ On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

⁽²⁾ Store the product in a cool, dry place for no more than 12 months. It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun.

Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	B	s	L	B	s	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
BUTYLBAND1501	15	1	15	0.6	39	49	20
BUTYLBAND1502	15	2	10	0.6	79	33	13

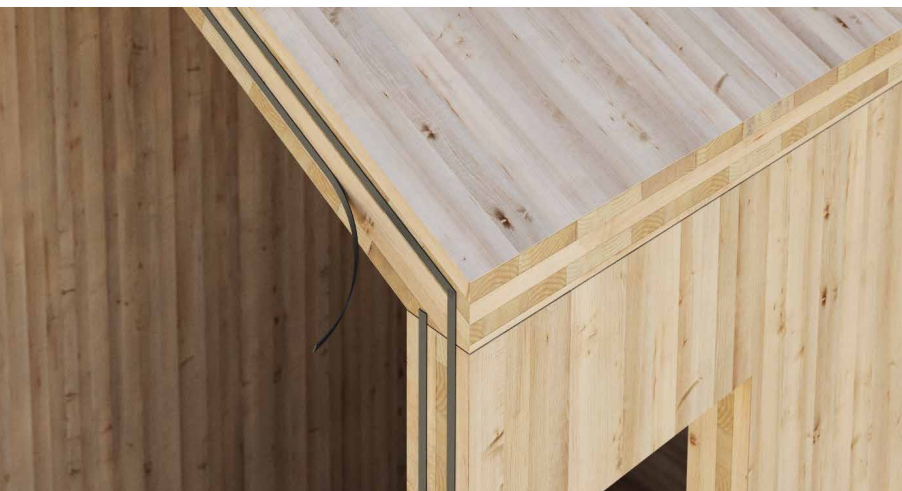

SPECIAL BUTYL MIX

Thanks to its special modified butyl formulation, it ensures excellent durability even when subjected to thermal stress and UV rays.

ADAPTABLE

Butyl is also perfectly suited for installation in tight spaces and on irregular profiles without resistance.