rothoblaas

Solutions for Safety

TOWER PEAK

INSTALLATION MANUAL



INCLUDED IN THE PACKAGE





GL24H

TOWER 300/400/500/600/800 + TOWERPEAK
TOWER A2 300/400/500 + TOWERPEAK

EN 795:2012 A+C

CEN/TS 16415:2013

UNI 11578:2015 A+C

TOOLS






PRODUCT INFORMATION




S235JR
GALVANIZED


TOWER 300/400/500/600/800 + TOWERPEAK
TOWER A2 300/400/500 + TOWERPEAK

EN 795:2012 A+C

CEN/TS 16415:2013

UNI 11578:2015 A+C

TOWER PEAK DIMENSIONS

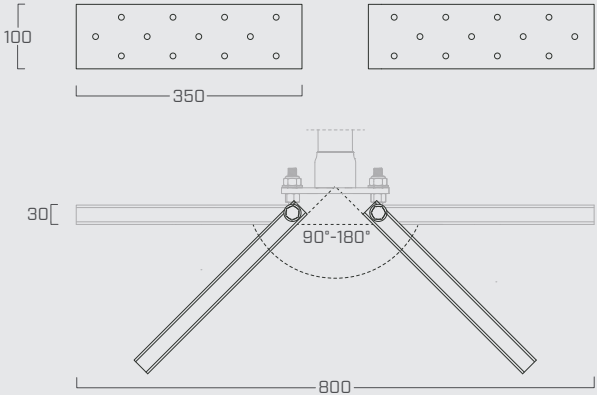

LOAD TEST MODEL TOWER 300/400/500/600/800 + TOWERPEAK TOWERA2 300/400/500 + TOWERPEAK


IT ⚠ Verificare idoneità statica del sottofondo di montaggio!

DE ⚠ Die statische Eignung des Montageuntergrundes sicherstellen!

EN ⚠ Check the static suitability of the installation substrate!


ES ⚠ ¡Compruebe la idoneidad estática del sustrato de montaje!


FR ⚠ Vérifer l'adéquation statique du substrat d'assemblage!

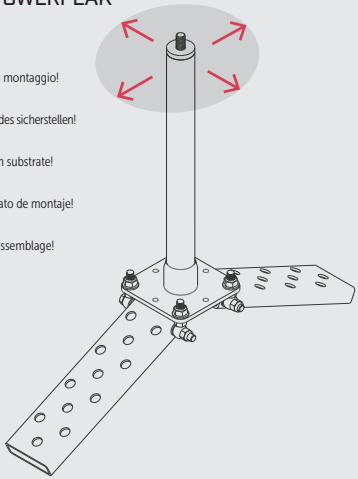



TOWER PEAK
TOWER INSTALLATION












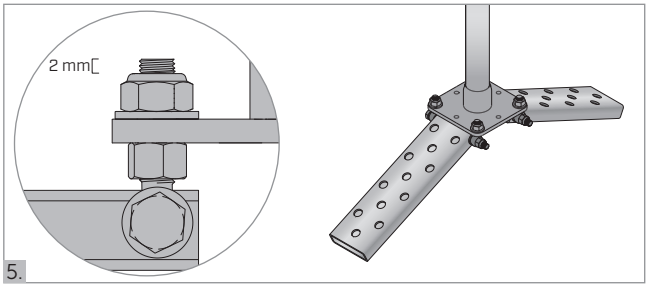


TOWER PEAK
WOOD SUBSTRUCTURE



GL24H






HBS

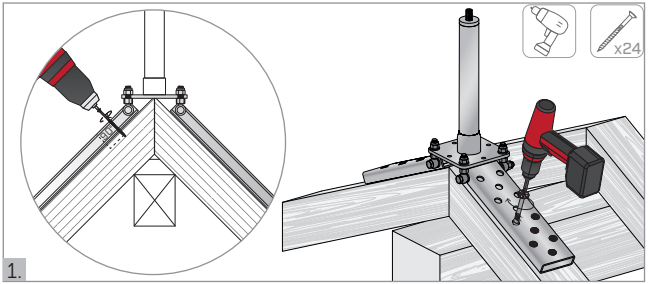


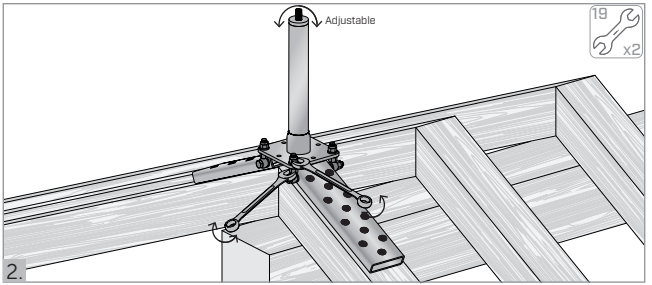

HBS 8 x L mm

HBS





d_1	=	8 mm	h_1	≥	100	mm
b	≥	100 mm	$h_{pd,min}$	≥	80	mm
L	≥	120 mm	h_1	≥	$h_{pd,min}$	

TOWER PEAK


SUBSTRUCTURE WITH INSULATING PANEL



GL24H






HBS

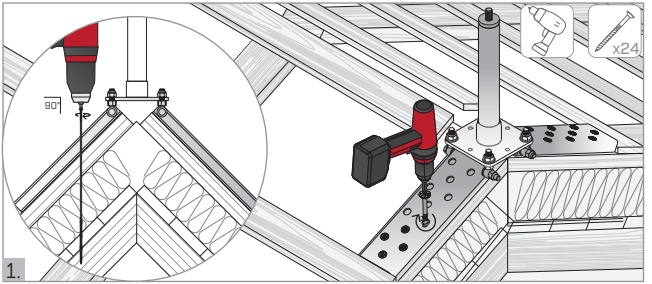


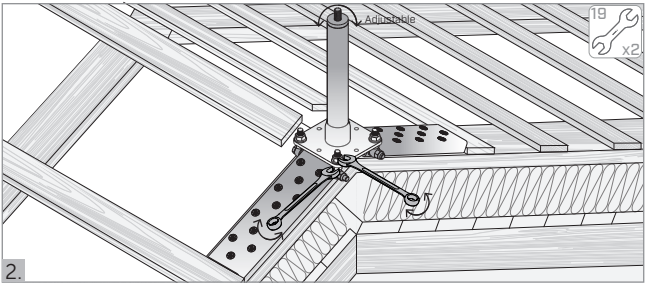

HBS 8 x L mm

HBS





Beam profile min 100 x 100 mm

d_1 = 8 mm | $h_{pd,min}$ ≥ 80 mm

h_1 ≥ 100 mm



Rotho Blaas Srl

02-24

Via dell'Adige N.2/1 | 39040, Cortaccia (BZ) | Italia
Tel: +39 0471 81 84 00 | Fax: +39 0471 81 84 84
info@rothoblaas.com | www.rothoblaas.com